



OR10H545M

HALF CELL LINE



HALF-CELL MODULE

The 144 Half Cut module of the Import Line combines the high production efficiency of the half cell technology with an excellent quality / price ratio.

The half-cell configuration improves the electrical distribution inside the panel to increase the yield of the product. For these reasons, the Half Cell Line is suitable not only for industrial installations but also for residential and commercial installations.

CELLS



144 CELLS
MONO 9BB / 10BB M10 HALF | **PERC**

182x91 mm / 7.16x3.58"

FRAME



COMPACT AND STURDY | **35 mm**

ANCHORABLE ALSO ON THE SHORT SIDE ⁽⁵⁾



30 YEAR **LINEAR POWER** WARRANTY

20 YEAR **PRODUCT** WARRANTY



PERC TECHNOLOGY



PID FREE



ANTI-REFLECTIVE GLASS



QBE INSURANCE
Product Liability Insurance QBE

ELECTRICAL CHARACTERISTICS (STC) ⁽¹⁾

Nominal Output (Pmax) ⁽²⁾	
Sorting Tolerance	
Voltage at Pmax (Vmp)	
Current at Pmax (Imp)	
Open Circuit Voltage (Voc) ⁽²⁾	
Short Circuit Current (Isc) ⁽²⁾	
Maximum System Voltage	
Maximum Series Fuse Rating	
Module Efficiency	
Protection class against electric shock	

OR10H545M

Nominal Output (Pmax) ⁽²⁾	545 W
Sorting Tolerance	0/+5 W
Voltage at Pmax (Vmp)	41.6 V
Current at Pmax (Imp)	13.11 A
Open Circuit Voltage (Voc) ⁽²⁾	49.9 V
Short Circuit Current (Isc) ⁽²⁾	13.84 A
Maximum System Voltage	1500 V
Maximum Series Fuse Rating	25 A
Module Efficiency	21.12%
Protection class against electric shock	Class II

MECHANICAL CHARACTERISTICS

Solar Cells	144 M10 HALF monocrystalline PERC
Solar Cells Size	182x91 mm / 7.16x3.58"
Front Cover	3.2 mm / 0.13" thick, low iron tempered glass
Back Cover	TPT (Tedlar-PET-Tedlar)
Encapsulant	EVA (Ethylene vinyl acetate)
Frame	Anodized aluminium alloy, double wall
Frame finishing	Silver
Backsheet finishing	White
Diodes	3 Bypass diodes serviceable
Junction Box	IP67 rated
Connector	MC4 or compatible connector
Cables Length	1300 mm / 51.18"
Cables Section	4.0 mm ² / 0.006 in ²
Dimensions	2278 x 1133 x 35 mm / 89.68 x 44.60 x 1.38" 2279 x 1134 x 35 mm / 89.72 x 44.64 x 1.38"
Weight	28 Kg / 61.72 lbs
Max Load (Test Load) - SF	5400 Pa - 1.5 ⁽⁵⁾

TEMPERATURE CHARACTERISTICS

NMOT ⁽³⁾	45±2 °C
Temperature Coefficient of Pmax	-0.37 %/°C
Temperature Coefficient of Voc	-0.28 %/°C
Temperature Coefficient of Isc	0.042 %/°C
Operating Temperature	-40 °C - +85°C


PACKAGING ⁽⁴⁾

Pallet dimensions	2310 × 1130 × 1260 mm / 90.94 × 44.50 × 49.61"
Pieces per pallet	30 / 31
Weight	861 kg / 1898.18 lbs (30 pieces per pallet) 880 kg / 1940.07 lbs (31 pieces per pallet)



CERTIFICATIONS

PID free	IEC TS 62804-1:2015
Salt mist	IEC 61701:2011
Ammonia	IEC 62716:2013

DIMENSIONS

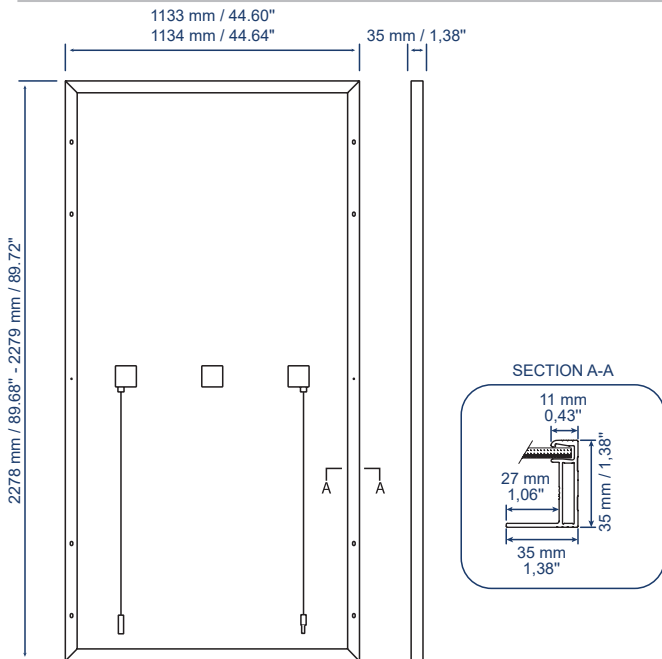

CURRENT/VOLTAGE CHARACTERISTICS

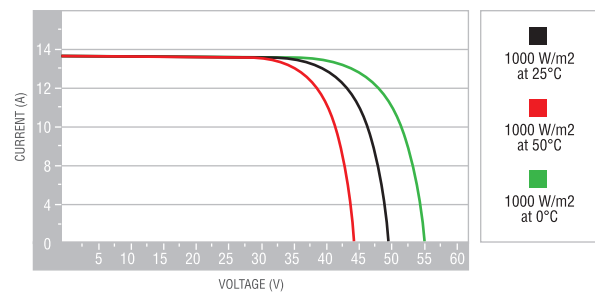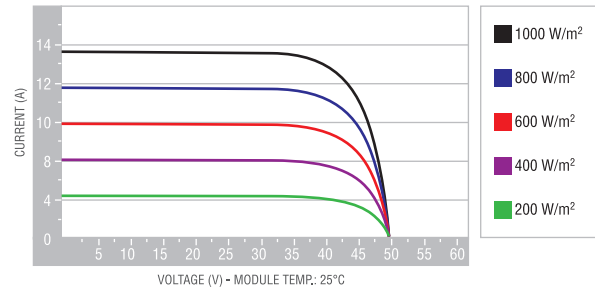

1. STC: (Standard Test Condition) Irradiance 1000W/m²; Module Temperature 25°C; Air Mass 1.5

2. Pmax, Voc, Isc measurement tolerance: ±3%

3. NMOT: Nominal Module Operating Temperature: Irradiance 800W/m²; Air 20°C; Wind speed 1m/s

4. Pallets can be stacked up to two

5. Consult the installation manual for the relative mounting configurations